



BESTPACK

THE EGG INDUSTRY STANDARD

CARTON SEALING SOLUTIONS

EGG FRIENDLY
CARTON
SEALING WITH
GENTLE PRECISION



QUICK HIGHLIGHTS

SEALS UP TO 27 CARTONS PER/MIN.*

*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Designed Specifically to Seal Egg Industry Standard Sizes
- Plastic Crate Bypass-Through
- Low Tape/No Tape Monitoring System
- Equipped with Allen-Bradley PLC w/Ethernet Capabilities
- Maintenance Free Air Cylinder




CARTON RANGE

Specifications based on CSEG11-2H

Length
(min.-max.)
(6.0"-25.5")

Width
(min.-max.)
(6.0"-14.0")

Height
(min.-max.)
(6.5"-20.0")



CSEG FULLY AUTOMATIC RANDOM CARTON SEALER

The BestPack™ CSEG Series is a Fully Automatic Random Carton Sealer. Designed for flexibility and high speed, our advanced engineering allows the CSEG to seal cartons and crate pass through at 27 cartons per minute. Our CSEG machine is built for the egg industry's standard carton sizes: 30, 24, 18, 15, 12, 9, and 5 dozen, as well as for reusable plastic crates.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT


*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BESTPACK.COM

VERSION 5.1_0525



DOUBLE STACKED CYLINDERS

Rapidly achieve the desired carton height based on common industry carton sizes.

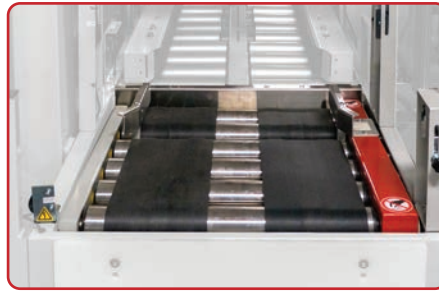

DROP DOWN INDEXER

Withstand the pressure from back-ups while creating optimal spacing to ensure the machine is uninterrupted.



EWON VPN WIFI MODULE

Allows for easy diagnosis for your machine saving you on costly maintenance visits and downtime.



SEALS STANDARD EGG CARTON SIZES

Seals 5, 7.5, 9, 12, 15, 24, & 30 dozen egg carton industry standard sizes.



BESTPACK'S "SOFT TOUCH" SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

MACHINE FOOTPRINT

Specifications based on CSEG11L-2H

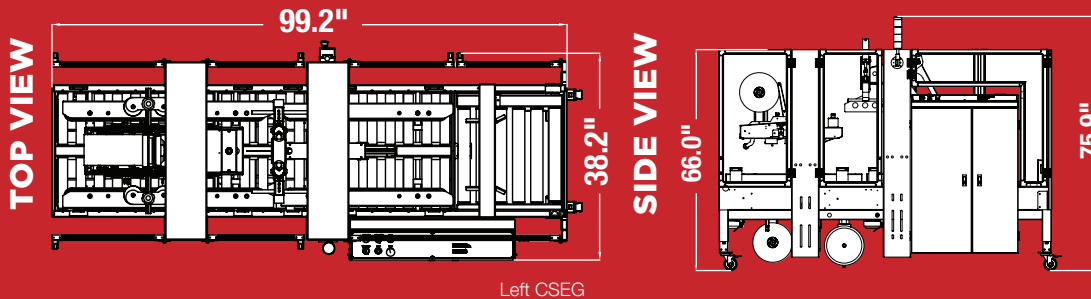

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- Available in Stainless Steel
- Servo Motor Capabilities
- Additional safety options
 - Entry/Exit Gates
 - AB Safety Relay, Dual Channel
 - Interlocks and Dump Valves

POPULAR CSEG MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE*** LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
CSEG11-2H** 2" Tape Head	(99.2") x (38.2") x (75.9")	(6.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	(25.5" - 30.0")	Up to 27	1,320	110 Volts 60 Hz	85 PSI, 12+ SCFM
CSEG11-3H** 3" Tape Head	(99.2") x (38.2") x (75.9")	(6.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	(25.5" - 30.0")	Up to 27	1,320	110 Volts 60 Hz	85 PSI, 12+ SCFM

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY | **HIGH SPEED

STANDARD EGG CARTON SIZES:

5 Dozen	(12.0" x 12.0" x 5.0")	9 Dozen	(12.0" x 12.0" x 8.75" - 9.0")	15 Dozen	(12.0" x 12.0" x 13.75" - 14.0")	30 Dozen	(24.0" x 12.0" x 13.5")
7.5 Dozen	(12.0" x 12.0" x 8.0")	12 Dozen	(20.0" x 12.0" x 11.5")	24 Dozen	(24.0" x 12.0" x 11.0")		



For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.