

MANUAL QUAD BELT

CARTON SEALING SOLUTION

PERFECT FOR

HEAVY-DUTY &

UNSTABLE CARTONS

QUICK HIGHLIGHTS




SEALS UP TO 50 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- 2 Top and 2 Side Belt Drive System for Heavy and Unstable Cartons
- Top Compression Rollers to Improve Carton Stability
- Mounting of Electrical Box on Either Side
- Capable of Interchanging Between 2" or 3" Tape Head

CARTON RANGE

Specifications based on MQ22-2

Length (min. - max.)	Width (min. - max.)	Height (min. - max.)
(6.0" - U)	(7.5" - 21.0")	(4.5" - 20.5")

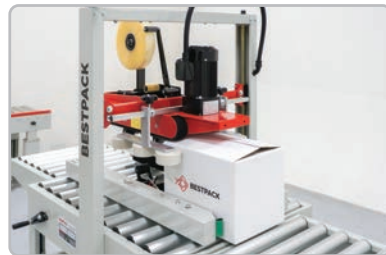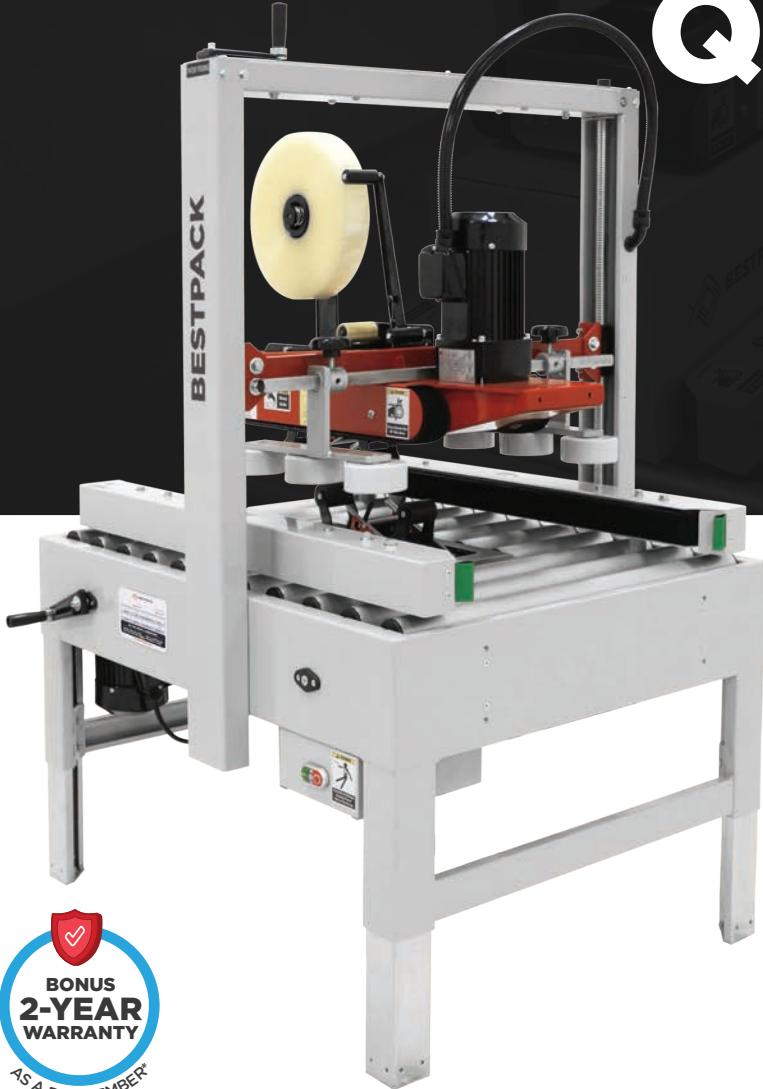

MQ MANUAL QUAD DRIVE

The BestPack™ MQ Series is designed to effectively fulfill heavy-duty and unstable sealing needs. Featuring a quad-belt drive, two on the side and two on the top, the MQ series will securely pull through unstable cartons and is powered by three 110V UL-approved electric motors. The mast allows for an extra 4" carton height extension on the upper assembly.




FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION


WWW.BESTPACK.COM

VERSION 5.0_0124

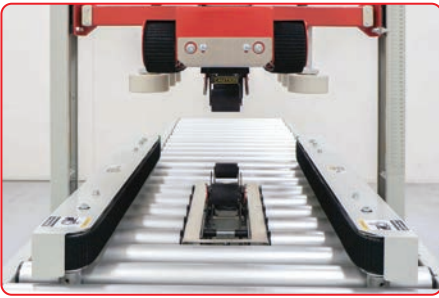


2 TOP AND 2 SIDE BELT DRIVES

Gently pulls product through while reducing less wear & tear on parts.

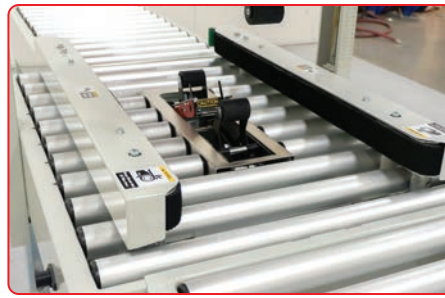

COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.

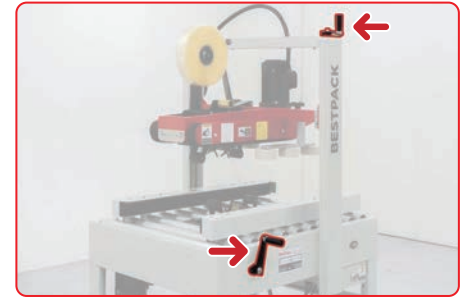

MANUAL HEIGHT & WIDTH ADJUSTMENT

Ability to adjustments height & width allowing accommodation of various box sizes.



TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.



CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

MACHINE FOOTPRINT

Specifications based on MQ22-2

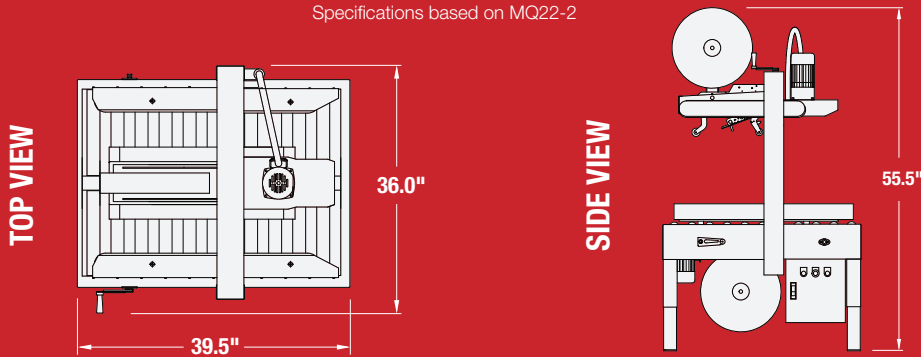

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- High-Speed Options (Up to 125 ft. per min.)
- Motorized Height Adjustment
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel
- Low Tape/No Tape Monitoring

POPULAR MQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
MQ22-2 or 22-3 2" or 3" Tape Head	(39.5") x (36.0") x (55.5")	(6.0" - U) x (7.5" - 21.0") x (4.5" - 20.5")	(20.5" - 30.0")	Up to 40	385	110 Volts 60 Hz	N/A
MQ22-2H** or 22-3H** 2" or 3" Tape Head	(39.5") x (36.0") x (55.5")	(6.0" - U) x (7.5" - 21.0") x (4.5" - 20.5")	(20.5" - 30.0")	Up to 50	385	110 Volts 60 Hz	N/A
MQ33-3 3" Tape Head	(39.5") x (43.0") x (81.0")	(6.0" - U) x (7.5" - 30.0") x (6.0" - 30.0")	(20.5" - 30.0")	Up to 25	542	110 Volts 60 Hz	N/A
MQ33-3H** 3" Tape Head	(39.5") x (43.0") x (81.0")	(6.0" - U) x (7.5" - 30.0") x (6.0" - 30.0")	(20.5" - 30.0")	Up to 32	542	110 Volts 60 Hz	N/A
MQ44-3 3" Tape Head	(39.5") x (53.0") x (91.0")	(6.0" - U) x (7.5" - 40.0") x (6.0" - 40.0")	(20.5" - 30.0")	Up to 25	600	110 Volts 60 Hz	N/A

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY | U - UNLIMITED | **HIGH SPEED



For more information please go to:
WWW.BESTPACK.COM or call us at **1.888.588.2378**

© 2024 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.