

# RANDOM LOW PROFILE LOW PROFILE

## 6-INCH CARTON SEALING SOLUTION



**SEALS CARTONS  
AS LOW AS 2.5" IN HEIGHT**

**WITH 6" SEAL**

### QUICK HIGHLIGHTS


**SEALS UP TO 12 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- “Soft Touch” Pneumatic System is Gentle on Cartons
- Low Profile 6-Inch Top & Bottom Seal
- Dual Telescoping Masts
- Seals Random Size Cartons Without Stopping for Adjusting

### CARTON RANGE

Specifications based on RSL22-6

Length (min. - max.)	Width (min. - max.)	Height (min. - max.)
<b>(6.0" - U)</b>	<b>(9.7" - 21.6")</b>	<b>(2.5" - 20.5")</b>



# RSL-6

## 6-INCH RANDOM SIDEDRIVE LOW PROFILE

The BestPack RSL-6 is a Semi-Automatic Random Tape Carton Sealer and is the 6" version of our RSL low-profile machine. Built for speed and durability, the RSL's low profile feature allows for the effective sealing of cartons at a minimum height of 2.5". The RSL-6 is perfect for random applications needing extra security, tamper protection, and pilferage prevention, and also effectively seals cartons that are overly heavy, over-filled, or otherwise difficult to keep sealed.



**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION  
[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 5.0\_0224



### “SOFT TOUCH” PNEUMATIC SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.



### SIDE BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.



### 6-INCH TAPE HEAD (MOTOR OPTIONAL)

Provides added security, preventing tampering, pilferage, and seals difficult to handle cartons.



### OFFSET TAPE HEADS

Enables precise and efficient sealing of low-profile cartons, individually sealing top and bottom of carton.




### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.

## MACHINE FOOTPRINT

Specifications based on RSL22-6

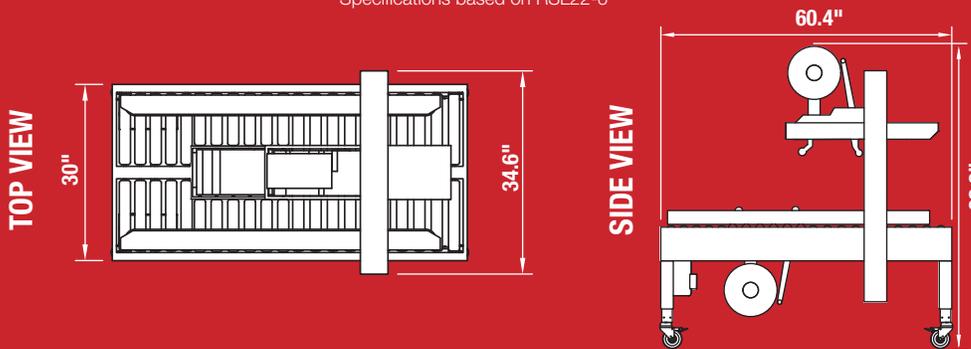

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- High-Speed Motor Upgrade (up to 125 ft.)
- Heavy Duty Locking Casters
- Infeed/Exit Conveyor w/L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel
- Motorized Tape Head Upgrade

## POPULAR RSL-6 MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
RSL22-6 6" Tape Head	(60.4") x (34.6") x (62.8")	(6.0" - U) x (9.7" - 21.6") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 12	450	110 Volts 60 Hz	80 PSI, 5 SCFM

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY  
U - UNLIMITED

ALL MODELS AVAILABLE IN HIGH SPEED & FOOD GRADE 304 STAINLESS STEEL



# BESTPACK

For more information please go to:  
**WWW.BESTPACK.COM** or call us at **1.888.588.2378**

© 2024 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.